

February 25, 2021

Attention: Tanya Francis
TECHNICAL STANDARDS & SAFETY AUTHORITY
345 CARLINGVIEW DRIVE
TORONTO, ON M9W 6N9

The design submission, tracking number 2021-00729, originally received on February 10, 2021 was surveyed and accepted for registration as follows:

CRN : 0C06261.52

Accepted on: February 25, 2021

Reg Type: RENEWAL

Expiry Date: December 21, 2030

Drawing No. : SEE ATTACHED REGISTRATION SCOPE

Fitting type: VQ, NP6 & V SERIES NEEDLE VALVES

Design registered in the name of : PARKER HANNIFIN

The registration is conditional on your compliance with the following notes:

*** The Scope of this Registration include renewal of VQ, NP6 & V series needle valves*

As indicated on AB-41 Statutory Declaration form and submitted documentation, the code of construction are ASME B31.3 and other engineering analysis.

- It is our understanding that the fitting(s), included as the scope of this submission, that is(are) subject to the Safety Codes Act shall comply with the requirements of the indicated Standard or Code of Construction on the AB-41 Statutory Declaration as supported by the attached data which identifies the dimensions, materials of construction, press./temp. ratings and the basis for such ratings, and the identification marking of the fittings.*
- This registration is valid only for fittings fabricated at the location(s) covered by the QC certificate attached to the accepted AB-41 Statutory Declaration form.*
- This registration is valid only until the indicated expiry date and only if the Manufacturer maintains a valid quality management system approved by an acceptable third-party agency until that date.*
- Should the approval of the quality management system lapse before the expiry date indicated above, this registration shall become void.*

An invoice covering survey and registration fees will be forwarded from our Revenue Accounts.

If you have any question don't hesitate to contact me by phone at (780) 433-0281 ext 3337 or fax (780) 437-7787 or e-mail Dick@absa.ca.

Sincerely,



DICK, ASHLING, P. Eng.
DOP Cert. No. D00007936



Technical Standards and Safety Authority
345 Carlingview Drive
Toronto, Ontario M9W 6N9
www.tssa.org

Show facsimile of manufacturer's logo or trademark, as it will appear on the fitting, in the space below

P

STATUTORY DECLARATION Registration of Fittings

I, Craig Beckwith, Division General Manager

(Name and Position, e.g. President, Plant Manager, Chief Engineer)

of Parker Hannifin Corporation, Instrumentation Products Division

(Name of Manufacturer)

Located at 1005 A Cleaner Way, Huntsville, Alabama, USA 35805

(Plant Address)

256-881-2040

(Telephone No.)

(Fax No.)

☐ do solemnly declare that the fittings listed hereunder, which are subject to the **Technical Standards and Safety Act**, Boilers and Pressure Vessels Regulation, comply with all of the requirements of

(Title of recognized North American Standard)

which specifies the dimensions, materials of construction, pressure/temperature ratings, identification marking the fittings and service;

☒ or are not covered by the provisions of a recognized North American standard and are therefore manufactured to comply with MSS-SP-99 as supported by the attached data which identifies the dimensions, material of construction, pressure/temperature ratings and the basis for such ratings, the marking of the fitting for identification and service.

I further declare that the manufacture of these fittings is controlled by a quality system meeting the requirements of ISO 9001:2015 which has been verified by the following authority, DNV-GL.

The items covered by this declaration, for which I seek registration, are category C type fittings. In support of this application, the following information and/or test data are attached as follows:

Scope of Registration with Attachments renewal of CRN 0C6261.5

(drawings, calculations, test reports, etc.)

Declared before me at Huntsville in the State of Alabama

the 3rd day of June AD 2020.

Commissioner for Oaths:

Sheri Coggan

(Printed name)

Sheri Coggan

(Signature)

[Signature]

(Signature of Declarer)

FOR OFFICE USE ONLY

To the best of my knowledge and belief, the application meets the requirements of the **Technical Standards and Safety Act**, Boilers and Pressure Vessels Regulation, and CSA Standard B51 and is accepted for registration in Category _____.

CRN: _____

Registered by: _____

Dated: _____

NOTE: This registration expires on: _____

2021-00729

ABSA

SAFETY CODES ACT - PROVINCE OF ALBERTA

ACCEPTED: 0C06261.52

See acceptance letter for conditions of registration.

Date: 2021-02-25

By: [Signature]

ASHLING DICK, P. Eng.

This stamp and signature have been affixed electronically to this registered design as required by Section 20(1) of the Pressure Equipment Safety Regulation, in accordance with the Electronic Transactions Act.

Registration Scope

This stamp and signature have been affixed electronically to this registered design as required by Section 20(1) of the Pressure Equipment Safety Regulation, in accordance with the Electronic Transactions Act.

Parker Hannifin

Instrumentation Products Division

Catalog 4110-NV May 2019, Pages 2-7

V Series Needle Valves

Based on the below summary we seek registration for the attached scope.

Series/Model	Size	Shell Pressure Rating, CWP	Body Material	Packing	Test Ref.
V Series	1/8"	5000 psi	ASTM A 182 Type F316	PTFE	Dec 1, Line 4
V Series	1/4"	5000 psi	ASTM A 182 Type F316	PTFE	Dec 1, Line 2
V Series	3/8"	5000 psi	ASTM A 182 Type F316	PTFE	Dec 1, Line 6
V Series	1/2"	5000 psi	ASTM A 182 Type F316	PTFE	Dec 2, Line 1
V Series	1/8"	3000 psi	ASTM B 283, Alloy C37700	PTFE	Dec 2, Line 5
V Series	1/4"	3000 psi	ASTM B 283, Alloy C37700	PTFE	Dec 2, Line 6
V Series	3/8"	3000 psi	ASTM B 283, Alloy C37700	PTFE	Dec 1, Line 5
V Series	1/2"	3000 psi	ASTM B 283, Alloy C37700	PTFE	Dec 1, Line 7

Specifications**Pressure Ratings:**

316 Stainless Steel: 5000 psig (345 bar) CWP

Brass

3000 psig (207 bar) CWP

Orifice: 0.078" to 0.312" (2.0mm to 7.9mm)**C_v:** 0.12 to 1.90**Port size:** 1/8" to 3/4" (3mm to 12mm)**Temperature Ratings:**

Stainless Steel

-65°F to 450°F (-54°C to 232°C)

Brass: -65°F to 400°F (-54°C to 204°C)

PTFE Packing:

-65°F to 450°F (-54°C to 232°C)

PCTFE Stem Tip:

-65°F to 350°F (-54°C to 177°C)

Nitrile Rubber Stem Seal:

-30°F to 250°F (-34°C to 121°C)

Fluorocarbon Rubber Stem Seal:



-15°F to 400°F (-26°C to 204°C)

Ethylene Propylene Rubber Stem Seal:

-70°F to 275°F (-57°C to 135°C)

Note: When combining body, seat and seal materials, the most restrictive temperature rating becomes the limiting factor on temperature range.

Pressure vs. Temperature

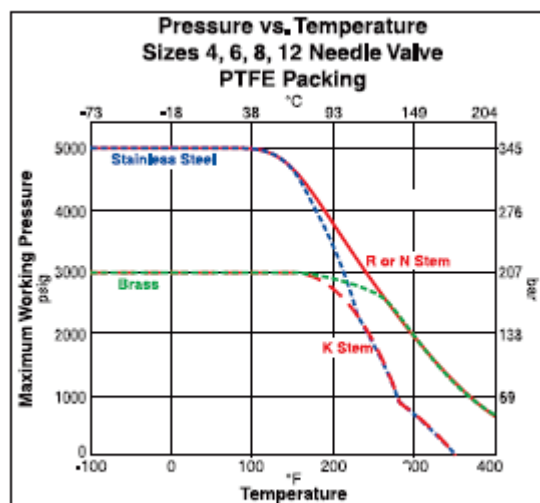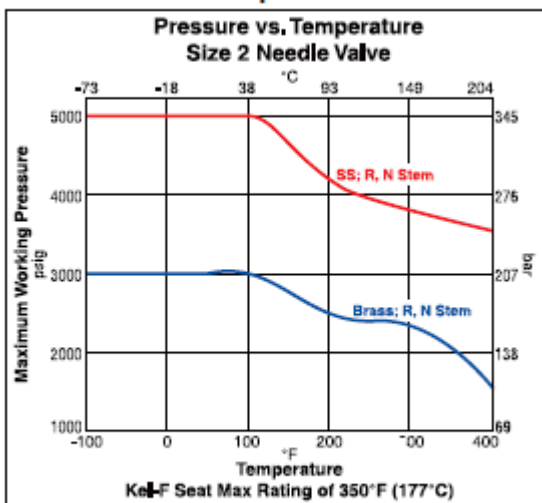

Note: To determine MPa, multiply bar by 0.1

Materials of Construction (with PTFE Packing)

Item #	Part Description	Stainless Steel	Brass
1	Body	ASTM A 182 Type F316	ASTM B 283 Alloy C37700
2	Packing Nut	ASTM A 479 Type 316	ASTM A 479 Type 316
3	Handle*	Nylon 6/6 with SS insert	Nylon 6/6 with SS insert
4	Lower Packing Washer	ASTM A 479 Type 316	ASTM A 479 Type 316
5	Handle Screw	Stainless Steel	Stainless Steel
6	Packing**	PTFE	PTFE
7	Stem (R and N Stem)	ASTM A 276 Type 316	ASTM A 276 Type 316
7A	Stem (K Stem)	ASTM A 276 Type 316, with PCTFE	ASTM A 276 Type 316, with PCTFE
8	Upper Packing Washer	Brass	Brass
9	Panel Nut***	316 Stainless Steel	316 Stainless Steel

* Handles for V8 and V12 Series Valves with R and N Stems are aluminum T-bars.

** Optional O-ring elastomeric stem seals are available – See How to Order.

*** Panel Nut is nickel plated brass on V2 Series Valves. Panel Nuts must be ordered separately – See page 7.

Lubrication: Perfluorinated Polyether

Dimensions / Flow Data

Basic Part Number		End Connections		Stem Type	Flow Data						Dimensions	
		Inlet (Port 1)	Outlet (Port 2)		Orifice		Inline		Angle		A† and B†	
Inline	Angle				Inch	mm	C _V	X _T *	C _V	X _T *	Inch (mm)	
2A-V2LR-SS	2A-V2AR-SS	1/8" Compression A-LOK®		Blunt	0.078	2.0	0.12	0.78	0.14	0.67	1.01 (25.7)	
2A-V2LN-SS	2A-V2AN-SS		Needle	0.12			0.80	0.14	0.63			
2A-V2LK-SS	2A-V2AK-SS		PCTFE	0.13			0.83	0.14	0.63			
2F-V2LR-SS	2F-V2AR-SS	1/8" Female NPT		Blunt	0.093	2.4	0.13	0.61	0.16	0.49	0.94 (23.9)	
2F-V2LN-SS	2F-V2AN-SS		Needle	0.12			0.66	0.18	0.39			
2F-V2LK-SS	2F-V2AK-SS		PCTFE	0.12			0.73	0.17	0.54			
2M-V2LR-SS	2M-V2AR-SS	1/8" Male NPT		Blunt	0.093	2.4	0.13	0.61	0.16	0.49	0.75 (19.1)	
2M-V2LN-SS	2M-V2AN-SS		Needle	0.12			0.66	0.18	0.39			
2M-V2LK-SS	2M-V2AK-SS		PCTFE	0.12			0.73	0.17	0.54			
2Z-V2LR-SS	2Z-V2AR-SS	1/8" Compression CPI™		Blunt	0.078	2.0	0.12	0.78	0.14	0.67	1.01 (25.7)	
2Z-V2LN-SS	2Z-V2AN-SS		Needle	0.12			0.80	0.14	0.63			
2Z-V2LK-SS	2Z-V2AK-SS		PCTFE	0.13			0.83	0.14	0.63			
2F-V4LR-SS	2F-V4AR-SS	1/8" Female NPT		Blunt	0.176	4.5	0.43	0.77	0.55	0.63	0.81 (20.6)	
2F-V4LN-SS	2F-V4AN-SS		Needle	0.43			0.69	0.55	0.63			
2F-V4LK-SS	2F-V4AK-SS		PCTFE	0.45			0.55	0.58	0.68			
4A-V4LR-SS	4A-V4AR-SS	1/4" Compression A-LOK®		Blunt	0.176	4.5	0.43	0.85	0.55	0.63	1.15 (29.2)	
4A-V4LN-SS	4A-V4AN-SS		Needle	0.43			0.77	0.55	0.63			
4A-V4LK-SS	4A-V4AK-SS		PCTFE	0.45			0.69	0.58	0.68			
4M-V4LR-SS	4M-V4AR-SS	1/4" Male NPT		Blunt	0.176	4.5	0.43	0.85	0.55	0.63	0.94 (23.9)	
4M-V4LN-SS	4M-V4AN-SS		Needle	0.43			0.77	0.55	0.63			
4M-V4LK-SS	4M-V4AK-SS		PCTFE	0.45			0.69	0.58	0.68			
4Z-V4LR-SS	4Z-V4AR-SS	1/4" Compression CPI*		Blunt	0.176	4.5	0.43	0.85	0.55	0.63	1.15 (29.2)	
4Z-V4LN-SS	4Z-V4AN-SS		Needle	0.43			0.77	0.55	0.63			
4Z-V4LK-SS	4Z-V4AK-SS		PCTFE	0.45			0.69	0.58	0.68			
M6A-V4LR-SS	M6A-V4AR-SS	6mm Compression A-LOK®		Blunt	0.156	4.0	0.37	0.78	0.48	0.60	1.15 (29.2)	
M6A-V4LN-SS	M6A-V4AN-SS		Needle	0.37			0.72	0.48	0.58			
M6A-V4LK-SS	M6A-V4AK-SS		PCTFE	0.39			0.62	0.51	0.64			
M6Z-V4LR-SS	M6Z-V4AR-SS	6mm Compression CPI*		Blunt	0.156	4.0	0.37	0.78	0.48	0.60	1.15 (29.2)	
M6Z-V4LN-SS	M6Z-V4AN-SS		Needle	0.37			0.72	0.48	0.58			
M6Z-V4LK-SS	M6Z-V4AK-SS		PCTFE	0.39			0.62	0.51	0.64			
4F-V6LR-SS	4F-V6AR-SS	1/4" Female NPT		Blunt	0.228	5.8	0.73	0.90	1.23	0.50	0.94 (23.9)	
4F-V6LN-SS	4F-V6AN-SS		Needle	0.55			0.61	0.92	0.62			
4F-V6LK-SS	4F-V6AK-SS		PCTFE	0.80			0.87	1.23	0.56			
6A-V6LR-SS	6A-V6AR-SS	3/8" Compression A-LOK®		Blunt	0.228	5.8	0.73	0.90	1.23	0.50	1.29 (32.8)	
6A-V6LN-SS	6A-V6AN-SS		Needle	0.55			0.61	0.92	0.62			
6A-V6LK-SS	6A-V6AK-SS		PCTFE	0.80			0.87	1.23	0.56			
6M-V6LR-SS	6M-V6AR-SS	3/8" Male NPT		Blunt	0.228	5.8	0.73	0.90	1.23	0.50	1.03 (26.2)	
6M-V6LN-SS	6M-V6AN-SS		Needle	0.55			0.61	0.92	0.62			
6M-V6LK-SS	6M-V6AK-SS		PCTFE	0.80			0.87	1.23	0.56			
6Z-V6LR-SS	6Z-V6AR-SS	3/8" Compression CPI™		Blunt	0.228	5.8	0.73	0.90	1.23	0.50	1.29 (32.8)	
6Z-V6LN-SS	6Z-V6AN-SS		Needle	0.55			0.61	0.92	0.62			
6Z-V6LK-SS	6Z-V6AK-SS		PCTFE	0.80			0.87	1.23	0.56			
M10A-V6LR-SS	M10A-V6AR-SS	10mm Compression A-LOK®		Blunt	0.228	5.8	0.73	0.90	1.23	0.50	1.30 (33.0)	
M10A-V6LN-SS	M10A-V6AN-SS		Needle	0.55			0.61	0.92	0.62			
M10A-V6LK-SS	M10A-V6AK-SS		PCTFE	0.80			0.87	1.23	0.56			
M10Z-V6LR-SS	M10Z-V6AR-SS	10mm Compression CPI™		Blunt	0.228	5.8	0.73	0.90	1.23	0.50	1.30 (33.0)	
M10Z-V6LN-SS	M10Z-V6AN-SS		Needle	0.55			0.61	0.92	0.62			
M10Z-V6LK-SS	M10Z-V6AK-SS		PCTFE	0.80			0.87	1.23	0.56			

* Tested in accordance with ISA S75.02. Gas flow will be choked when $P_1 - P_2 / P_1 = x_T$.

† For CPI™ and A-LOK®, dimensions are measured with nuts in the finger tight position.

() Denotes dimensions in millimeters

Dimensions in inches/millimeters are for reference only, subject to change.

Based on the below summary we seek registration for the attached scope.

Series/Model	Size	Shell Pressure Rating, CWP	Body Material	Cap Material	Test Ref
VQ Series / Manual	1/4"	300 psi	ASTM A 182 Type F316	ASTM A 479 Type 316	Dec 2, Line 4
VQ Series / Manual	3/8"	300 psi	ASTM A 182 Type F316	ASTM A 479 Type 316	Dec 1, Line 3


Toggle Valve Specifications

Pressure Rating at All Temperatures:

Manual 300 psig (21 bar) CWP
Actuated N.C. V4Q 600 psig (41 bar) CWP
Actuated N.C. V6Q 500 psig (35 bar) CWP
Actuated N.O. & D.A. 450 psig (31 bar) CWP

Temperature Ratings:

PTFE Stem Tip: -20°F to 200°F (-29°C to 93°C)
PCTFE Stem Tip: -65°F to 200°F (-54°C to 93°C)

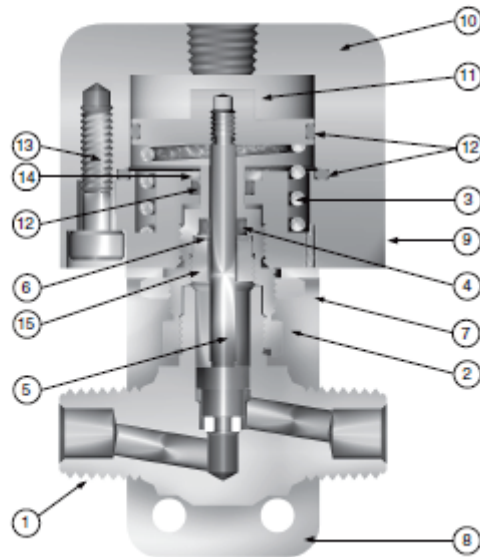

Materials of Construction


Item #	Description	Stainless Steel
1	Body	ASTM A 182 Type F316
2	Cap	ASTM A 479 Type 316
3	Spring*	Stainless Steel
4	Stem Seal**	Fluorocarbon Rubber
5	Stem	ASTM A 276 Type 316
6	Stem Washer	Stainless Steel
7	Panel/Lock Nut	316 Stainless Steel
8	Mounting Bracket	Aluminum
9	Actuator Base	Aluminum
10	Actuator Cap	Aluminum
11	Piston	Aluminum
12	Actuator Seals	Fluorocarbon Rubber
13	Screws	Stainless Steel
14	Actuator Bushing	Aluminum
15	Stem Bushing***	ASTM A 479 Type 316
16	Handle	Nylon 6/6
17	Handle Pin	Stainless Steel
18	Handle Washer	Acetal

* Spring not used on Double Acting (11AD) models

** Optional stem seal materials available - See How to Order

*** Stem Bushing not used on Normally Closed (11AC) models
Lubrication: Perfluorinated polyether

Minimum Actuating Pressures

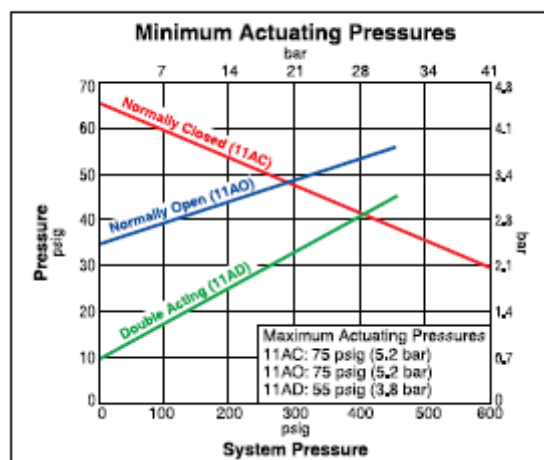

Dimensions / Flow Data

Basic Part Number	End Connections		Flow Data				Dimensions		Additional Options			
	Inlet (Port 1)	Outlet (Port 2)	Orifice		C _v	X _T *	A† and B†	Stem Tip	Stem Seal	Actuation	Body Material	
			Inch	mm			Inch (mm)					
2A-V4LQ-SSP	1/8" Compression A-LOK®		0.078	2.0	0.14	0.52	1.10	K = PCTFE	BN = Nitrile Rubber	11AC = Normally Closed	BP = Brass with Panel Nut	
2A-V4AQ-SSP					0.15	0.50	(27.9)					
2F-V4LQ-SSP	1/8" Female NPT		0.176	4.5	0.36	0.71	0.8					
2F-V4AQ-SSP					0.49	0.64	(20.6)					
2M-V4LQ-SSP	1/8" Male NPT		0.125	3.2	0.30	0.50	0.81					
2M-V4AQ-SSP					0.35	0.55	(20.6)					
2Z-V4LQ-SSP	1/8" Compression CPI™		0.078	2.0	0.14	0.52	1.10					
2Z-V4AQ-SSP					0.15	0.50	(27.9)					
4A-V4LQ-SSP	1/4" Compression A-LOK®		0.176	4.5	0.36	0.71	1.15					
4A-V4AQ-SSP					0.49	0.64	(29.2)					
4M-V4LQ-SSP	1/4" Male NPT		0.176	4.5	0.36	0.71	0.94					
4M-V4AQ-SSP					0.49	0.64	(23.9)					
4Z-V4LQ-SSP	1/4" Compression CPI™		0.176	4.5	0.36	0.71	1.15					
4Z-V4AQ-SSP					0.49	0.64	(29.2)					
M6A-V4LQ-SSP	6mm Compression A-LOK®		0.176	4.5	0.36	0.71	1.13					
M6A-V4AQ-SSP					0.49	0.64	(28.7)					
M6Z-V4LQ-SSP	6mm Compression CPI™		0.176	4.5	0.36	0.71	1.13					
M6Z-V4AQ-SSP					0.49	0.64	(28.7)					
M8A-V4LQ-SSP	8mm Compression A-LOK®		0.176	4.5	0.36	0.71	1.13					
M8A-V4AQ-SSP					0.49	0.64	(28.7)					
M8Z-V4LQ-SSP	8mm Compression CPI™		0.176	4.5	0.36	0.71	1.13					
M8Z-V4AQ-SSP					0.49	0.64	(28.7)					
4F-V6LQ-SSP	1/4" Female NPT		0.250	6.4	0.83	0.70	1.00	K = PCTFE	BN = Nitrile Rubber	11AC = Normally Closed	BP = Brass with Panel Nut	
4F-V6AQ-SSP					0.92	0.68	(25.4)					
6A-V6LQ-SSP	3/8" Compression A-LOK®		0.250	6.4	0.83	0.70	1.29					
6A-V6AQ-SSP					0.92	0.68	(32.8)					
6Z-V6LQ-SSP	3/8" Compression CPI™		0.250	6.4	0.83	0.70	1.29					
6Z-V6AQ-SSP					0.92	0.68	(32.8)					
8A-V6LQ-SSP	1/2" Compression A-LOK®		0.250	6.4	0.83	0.70	1.37					
8A-V6AQ-SSP					0.92	0.68	(34.8)					
8Z-V6LQ-SSP	1/2" Compression CPI™		0.250	6.4	0.83	0.70	1.37					
8Z-V6AQ-SSP					0.92	0.68	(34.8)					
M10A-V6LQ-SSP	10mm Compression A-LOK®		0.250	6.4	0.83	0.70	1.30					
M10A-V6AQ-SSP					0.92	0.68	(33.0)					
M10Z-V6LQ-SSP	10mm Compression CPI™		0.250	6.4	0.83	0.70	1.30					
M10Z-V6AQ-SSP					0.92	0.68	(33.0)					

* Tested in accordance with ISA S75.02. Gas flow will be choked when $P_2/P_1 \leq X_T$.
 † For CPI™ and A-LOK®, dimensions are measured with nuts in the finger tight position.

Dimensions in inches/millimeters are for reference only, subject to change.

Based on the below summary we seek registration for the attached scope .

Series/Model	Size	Shell Pressure Rating, CWP	Body Material	Test Ref
NP6 Series	3/8"	6000 psi	ASTM A 182 Type F316	Dec 1, Line 1

Specifications

Pressure Rating:

6000 psig (414 bar) CWP

Temperature Rating:

PTFE Packing:

-65°F to 450°F (-54°C to 232°C)

PCTFE:

-65°F to 350°F (-54°C to 177°C)

Nitrile Rubber:

-30°F to 250°F (-34°C to 121°C)

Ethylene Propylene Rubber:

-70°F to 275°F (-57°C to 135°C)

Fluorocarbon Rubber:

-15°F to 400°F (-26°C to 204°C)

Grafoil®:


-70°F to 700°F (-57°C to 371°C)

Materials of Construction


Item #	Description	Material
1	Body	ASTM A 182 Type F316
2	Packing Nut	ASTM A 479 Type 316
3	Lower Stem (R-Stem)	ASTM A 276 Type 316
3	Lower Stem (K-Stem)	ASTM A 276 Type 316, with PCTFE
4	Upper Stem	ASTM A 276 Type 316
5	Packing Gland	ASTM A 276 Type 316
6	Packing*	PTFE
7	Packing Washer	Stainless Steel
8	Handle**	Nylon 6/6, with SS Insert
9	Handle Screw	Stainless Steel
10	Packing Nut Screw	Stainless Steel
11	Dust Seal	Fluorocarbon Rubber
12	Panel Nut	316 Stainless Steel

* Optional elastomeric stem seals and Grafoil® packing are available - See How to Order.

** Handles for Grafoil® packed valves are aluminum T-bars.
Lubrication: Perfluorinated polyether

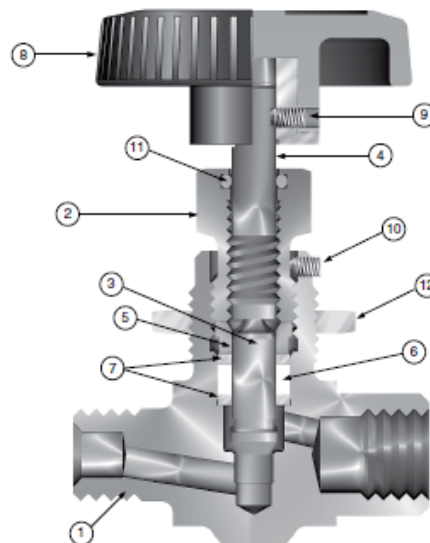


Pressure vs. Temperature

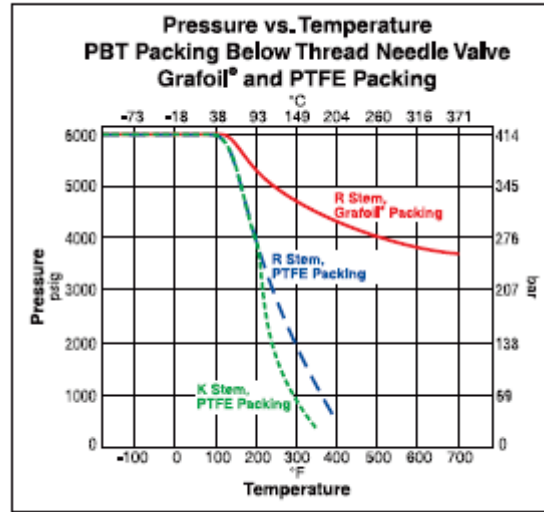

Note: To determine MPa, multiply bar by 0.1

Flow Characteristics

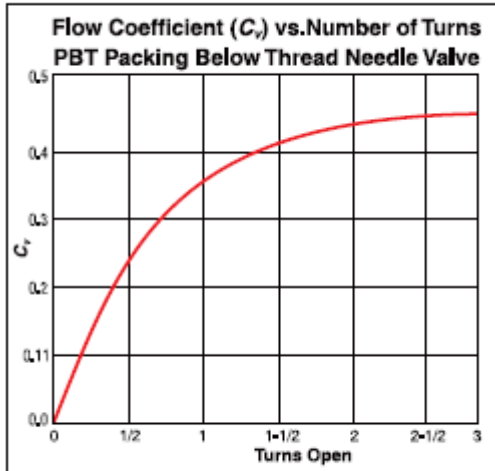

Note: When combining seat and seal materials, the most restrictive temperature rating becomes the limiting factor on temperature range.

Basic Part Number		End Connections		Stem Type	Flow Data						Dimensions
Inline	Angle	Inlet (Port 1)	Outlet (Port 2)		Orifice		Inline		Angle		A† and B† Inch mm
					Inch	mm	C _V	X _T * °	C _V	X _T * °	
4A-NP6LR-SSP	4A-NP6AR-SSP	1/4" Compression A-LOK®	Blunt	0.177	4.5	0.60	0.50	0.67	0.39	1.20	
4A-NP6LK-SSP	4A-NP6AK-SSP					PCTFE	0.51	0.55	0.65	0.52	(30.5)
4F-NP6LR-SSP	4F-NP6AR-SSP	1/4" Female NPT	Blunt	0.177	4.5	0.60	0.50	0.67	0.39	1.00	
4F-NP6LK-SSP	4F-NP6AK-SSP					PCTFE	0.51	0.55	0.65	0.52	(25.4)
4M-NP6LR-SSP	4M-NP6AR-SSP	1/4" Male NPT	Blunt	0.177	4.5	0.60	0.50	0.67	0.39	1.03	
4M-NP6LK-SSP	4M-NP6AK-SSP					PCTFE	0.51	0.55	0.65	0.52	(26.2)
4Z-NP6LR-SSP	4Z-NP6AR-SSP	1/4" Compression CPI™	Blunt	0.177	4.5	0.60	0.50	0.67	0.39	1.20	
4Z-NP6LK-SSP	4Z-NP6AK-SSP					PCTFE	0.51	0.55	0.65	0.52	(30.5)
6A-NP6LR-SSP	6A-NP6AR-SSP	3/8" Compression A-LOK®	Blunt	0.177	4.5	0.60	0.50	0.67	0.39	1.23	
6A-NP6LK-SSP	6A-NP6AK-SSP					PCTFE	0.51	0.55	0.65	0.52	(31.2)
6Z-NP6LR-SSP	6Z-NP6AR-SSP	3/8" Compression CPI™	Blunt	0.177	4.5	0.60	0.50	0.67	0.39	1.23	
6Z-NP6LK-SSP	6Z-NP6AK-SSP					PCTFE	0.51	0.55	0.65	0.52	(31.2)
M6A-NP6LR-SSP	M6A-NP6AR-SSP	6mm Compression A-LOK®	Blunt	0.177	4.5	0.60	0.50	0.67	0.39	1.16	
M6A-NP6LK-SSP	M6A-NP6AK-SSP					PCTFE	0.51	0.55	0.65	0.52	(29.5)
M6Z-NP6LR-SSP	M6Z-NP6AR-SSP	6mm Compression CPI™	Blunt	0.177	4.5	0.60	0.50	0.67	0.39	1.16	
M6Z-NP6LK-SSP	M6Z-NP6AK-SSP					PCTFE	0.51	0.55	0.65	0.52	(29.5)
M8A-NP6LR-SSP	M8A-NP6AR-SSP	8mm Compression A-LOK®	Blunt	0.177	4.5	0.60	0.50	0.67	0.39	1.24	
M8A-NP6LK-SSP	M8A-NP6AK-SSP					PCTFE	0.51	0.55	0.65	0.52	(31.5)
M8Z-NP6LR-SSP	M8Z-NP6AR-SSP	8mm Compression CPI™	Blunt	0.177	4.5	0.60	0.50	0.67	0.39	1.24	
M8Z-NP6LK-SSP	M8Z-NP6AK-SSP					PCTFE	0.51	0.55	0.65	0.52	(31.5)

* Tested in accordance with ISA S75.02. Gas flow will be choked when $P_1 - P_2 / P_1 = X_T$.

† For CPI™ and A-LOK®, dimensions are measured with nuts in the finger tight position.

Dimensions in Inches/millimeters are for reference only, subject to change.

Parker Hannifin

Summary

- Refer to the appropriate catalog pages attached to this document for the part number descriptions for the V Series, VQ Series, and NP6 Series Needle Valves.
- The minimum wall thickness for all valves in this line is at the undercut of the thread on the valve body.
- The Pressure and Temperature curves for each valve series are included in the attached catalog pages.
- The Cold Working Pressure (CWP) is established by burst testing in accordance with MSS SP-99.
- A diagram of the components and the materials of constructions for each valve series are included in the attached catalog pages.
- Refer to the attached product integrity report for each valve series.
- **ASME / Design Standard:** Stress calculations are supported by burst tests in accordance with MSS SP-99
- **Size or Size Range:** Refer to above tables and attached catalog pages
- **Standard Pressure Class or MAWP at Maximum Temperature:** Refer to attached catalog pages and product integrity reports
- **Actual Wall Thickness vs. Minimum Required:** Refer to attached product integrity reports
- **ASME / ASTM Material Specification:** The pressure boundary components are manufactured from materials listed in ASME B31.3. Refer to attached catalog pages and product integrity reports.
- Compression joint design (end connectors) is supported by **CRN 0A6793.5R3**.